
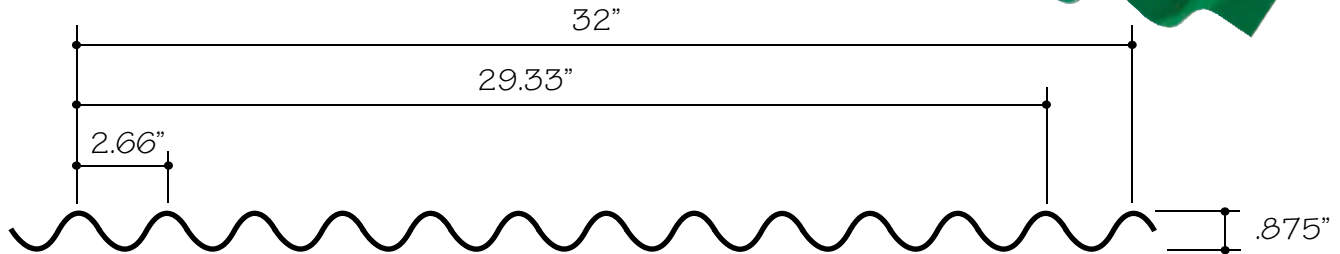


# Deep Corrugated

Deep is the traditional corrugated roofing panel. This profile offers strength and economy for commercial and residential applications. Rib height is 7/8" at 2-2/3" centers.

- Traditional look
- Strong
- Simple to install
- Custom lengths
- Plain and prepainted galvalume

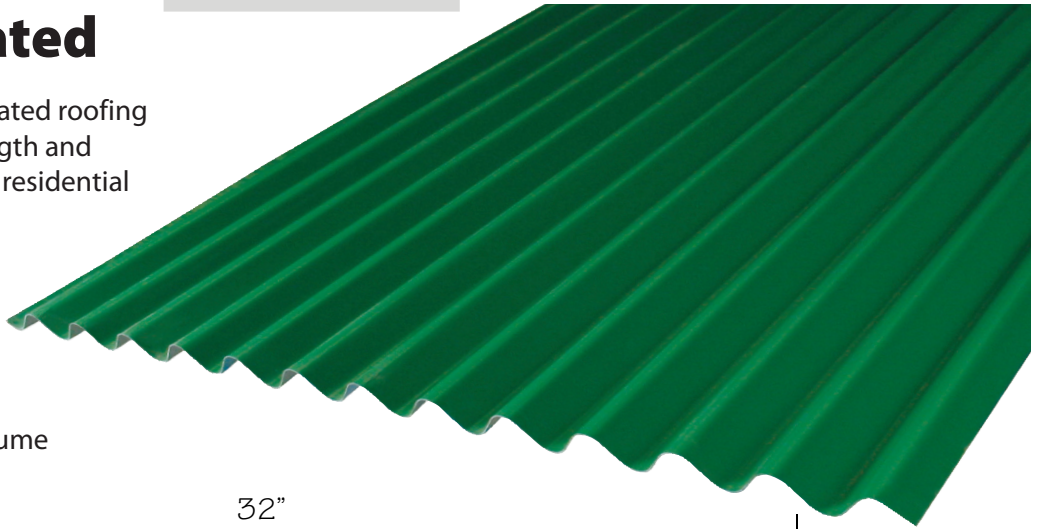

Allowable Load PSF		*Grade A FY=33KSi											
		36" SPAN			48" SPAN			54" SPAN			60" SPAN		
		SS	DS	TS	SS	DS	TS	SS	DS	TS	SS	DS	TS
<b>26 GAUGE</b>													
Roof	f	87.79	87.79	109.74	49.38	49.38	61.73	39.02	39.02	48.77	31.61	31.61	39.51
	L/240	63.87	87.79	109.74	26.95	49.38	50.87	18.92	39.02	48.77	13.80	31.61	26.05
	L/180	85.16	87.79	109.74	35.93	49.38	61.73	25.23	39.02	48.77	18.40	31.61	34.73
Wall	f	116.77	116.77	145.96	65.68	65.68	82.10	51.90	51.90	64.87	42.04	42.04	52.55
	L/240	63.87	116.77	120.59	26.95	65.68	50.87	18.92	45.59	35.73	13.80	33.23	26.05
	L/180	85.16	116.77	145.96	35.93	65.68	67.83	25.23	51.90	47.64	18.40	42.04	34.73
<b>24 GAUGE</b>													
Roof	f	105.79	105.79	132.24	59.51	59.51	74.38	47.02	47.02	58.77	38.08	38.08	47.61
	L/240	77.31	105.79	132.24	32.61	59.51	61.58	22.91	47.02	43.25	16.70	38.08	31.53
	L/180	103.08	105.79	132.24	43.49	59.51	74.38	30.54	47.02	58.77	22.27	38.08	42.04
Wall	f	140.70	140.70	175.88	79.14	79.14	98.93	62.53	62.53	78.17	50.65	50.65	63.32
	L/240	77.31	140.70	145.96	32.61	79.14	61.58	22.91	55.18	43.25	16.70	40.23	31.53
	L/180	103.08	140.70	172.88	43.49	79.14	82.10	30.54	62.53	57.66	22.27	50.65	42.04
<b>22 GAUGE</b>													
Roof	f	135.17	135.17	168.96	76.30	76.03	95.04	60.07	60.07	75.09	48.66	48.66	60.83
	L/240	99.48	135.17	168.96	41.97	76.03	79.24	29.48	60.07	55.65	21.49	48.66	40.57
	L/180	132.64	135.17	168.96	55.96	76.03	95.04	39.30	60.07	75.09	28.65	48.66	54.09
Wall	f	179.77	179.77	224.72	101.12	101.12	126.40	79.90	79.90	99.87	64.72	64.72	80.90
	L/240	99.48	179.77	187.83	41.97	101.12	79.24	29.48	71.00	55.65	21.49	51.76	40.57
	L/180	132.64	179.77	224.72	55.96	101.12	105.65	39.30	79.90	74.20	28.65	64.72	54.09

## Section Properties\*\*

GAUGE	26	24	22
Thickness (in.)	0.019	0.023	0.0296
S(+)	0.05986	0.07213	0.09216
S(-)	0.05986	0.07213	0.09216
I (+)	0.02676	0.03239	0.04168
I (-)	0.02676	0.03239	0.04168

\*Load tables for grade C & aluminum available upon request

\*\*Section properties for aluminum available upon request.

SS = Single Span DS = Double Span TS = Triple Span

## FASTENER PLACEMENT

